

C-Band Hydrometeor Classification Scheme and Its Application on Hail Detection over Central Argentina



Vidal L.¹, S. Nesbitt², P. Salio³, R. Mezher⁴, S. Ruiz Suarez¹

¹National Meteorological Service – Argentina ²Department of Atmospheric Sciences, University of Illinois, Urbana – Champaign.

³Atmospheric and Oceanic Research Institute – UBA CONICET / Department of Atmospheric Sciences and Oceanography – UBA / UMI IFAECI CNRS – Buenos Aires, Argentina

⁴Climate and Water Institute, National Institute of Agricultural Technology - Argentina



1. Motivation

Central Argentina is one of the most favorable regions for strong mesoscale convective systems in the world, especially during austral warm season. High impact weather events associated with these convective systems are flash flood, strong winds, hail, and tornadoes. DP weather radars may offer the opportunity to detect and identify different classes of hydrometeors present in convective storms. In particular, hydrometeor classification helps to detect hail shafts within storms, thus providing valuable information for nowcasting applications.

2. Objectives


Using C-Band observations from the Argentinian radar network, the aims of the present paper are:

1. To explore different polarimetric signatures from hail and rain, and
2. To evaluate the application of a hydrometeor identification algorithm based on a fuzzy logic approach over two severe hailstorms.

3. Radar data


- Dual polarization C-band radar data from Anguil are analyzed in the present paper.
- Cross-correlation coefficient field was used in order to eliminate non-precipitation echoes (<0.79).

PARAMETER	SPECIFICATION
Location	36° 32' 23" S / 63° 59' 24" W
Radar Type	Gematronik Meteor 600C DP
Polarisation	Dual (Horizontal/Vertical)
Wavelength	5,635 cm (C-band)
Power	250 kW
Maximum Range	240 km
Range Bin Spacing	0,5 km
Beam Width	0,98/0,98 degrees
PRT	2000 μ s
Pulse Width	2 μ s
Radar Height	170 m
Beam Elevations	12 elevations from 0,5 to 15,1 degrees
Recorded Fields	Horizontal Reflectivity (Z_{HH}), Radial Velocity (V), Spectral Width (W), Differential Reflectivity (Z_{DR}), Cross-Correlation Coefficient (ρ_{HV}), Differential Phase (Φ_{DP}), Specific Differential Phase (K_{DP}).
Task Cycle Time	10 minutes

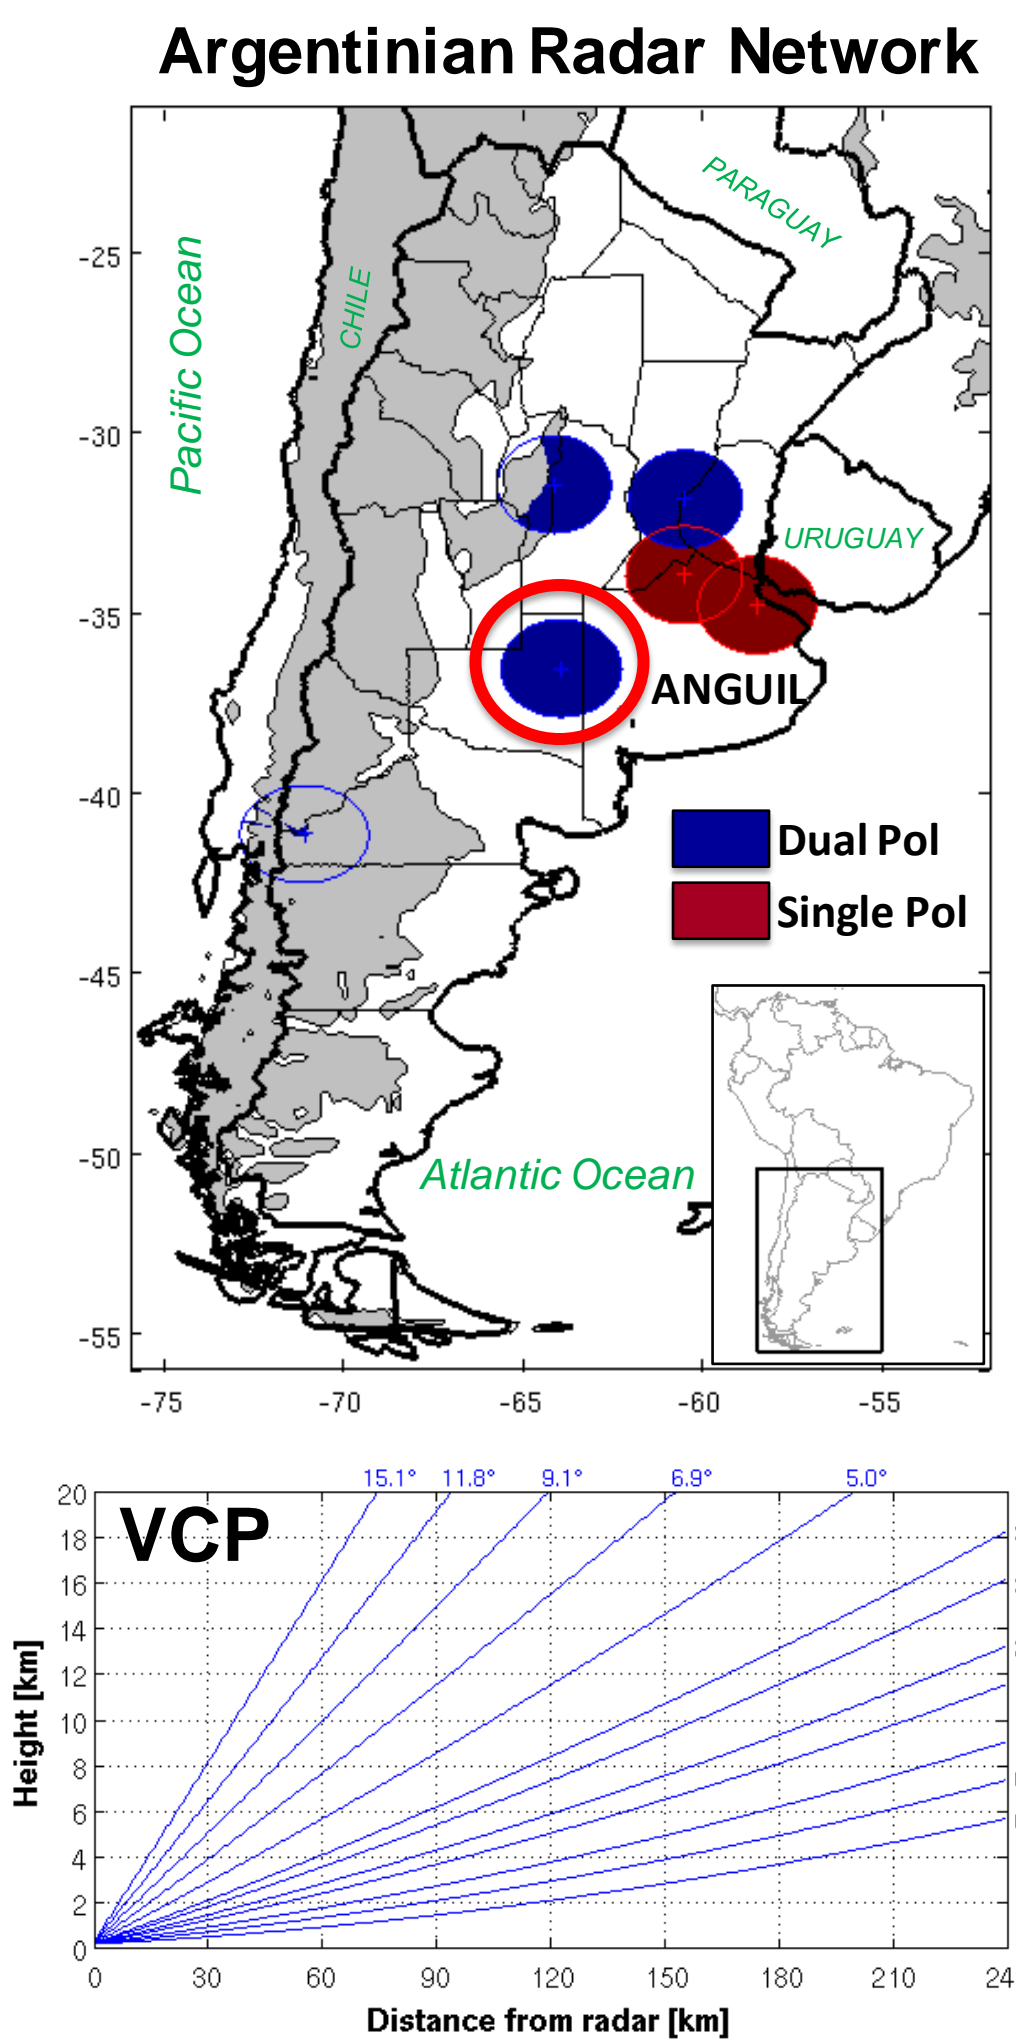

4. HID algorithm

- A fuzzy logic hydrometeor identification algorithm (HID) using Z_{HH} , Z_{DR} and ρ_{HV} was tested in two severe hailstorms events in Central Argentina.
- The algorithm is inspired on CSU-FHC scheme (Dolan and Rutledge, 2009).
- We consider just three hydrometeors categories: rain (RN), big drop (BD), and hail (HL).

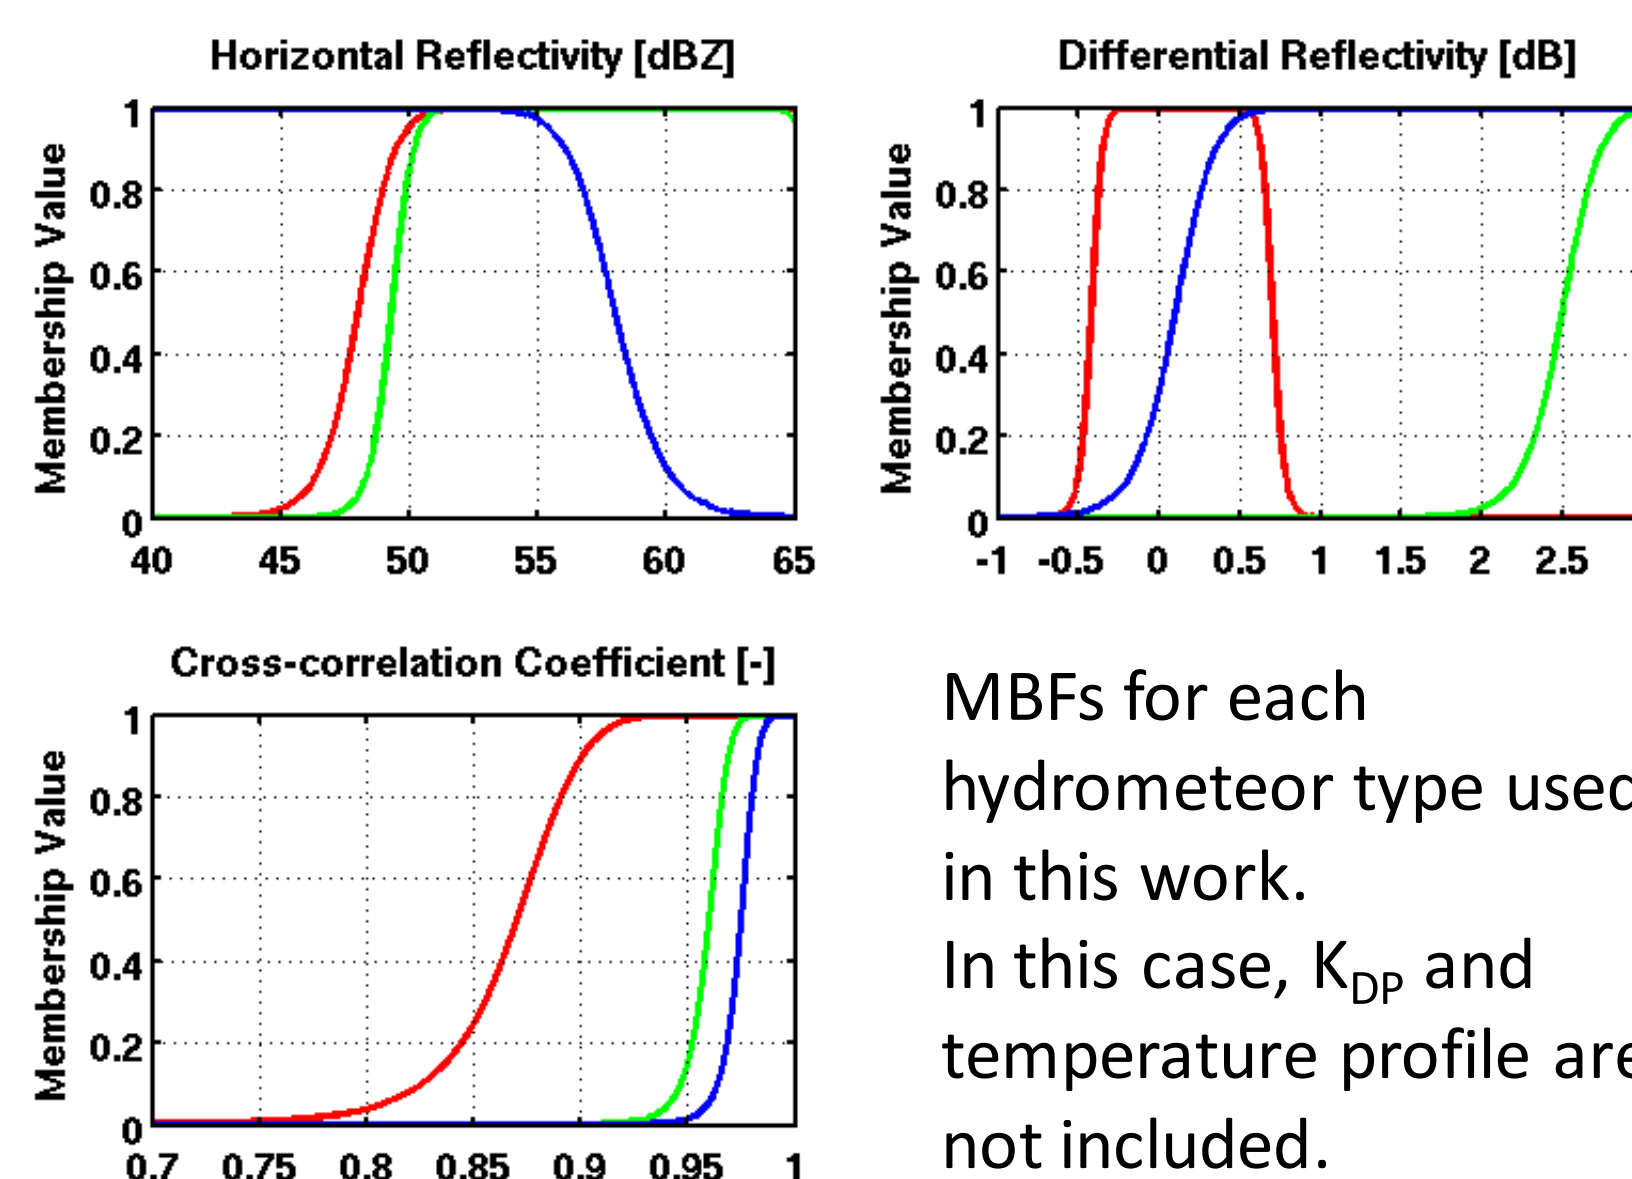

Each MBFs parameters for each hydrometeor type and fuzzy set are based on scattering simulations (Dolan and Rutledge, 2009).

MBFs for each hydrometeor type used in this work. In this case, K_{DP} and temperature profile are not included.


MBF definition

$$\beta = \frac{1}{1 + \left[\left(\frac{x - m}{a} \right)^2 \right]^b}$$

5. Hailstorm 13 January 2011

COLMAX maps


Multicellular system with embedded supercells produced damage due to strong wind gusts, small to moderate hail and even a tornado in Campo Nieves city (blue triangle in HID map).

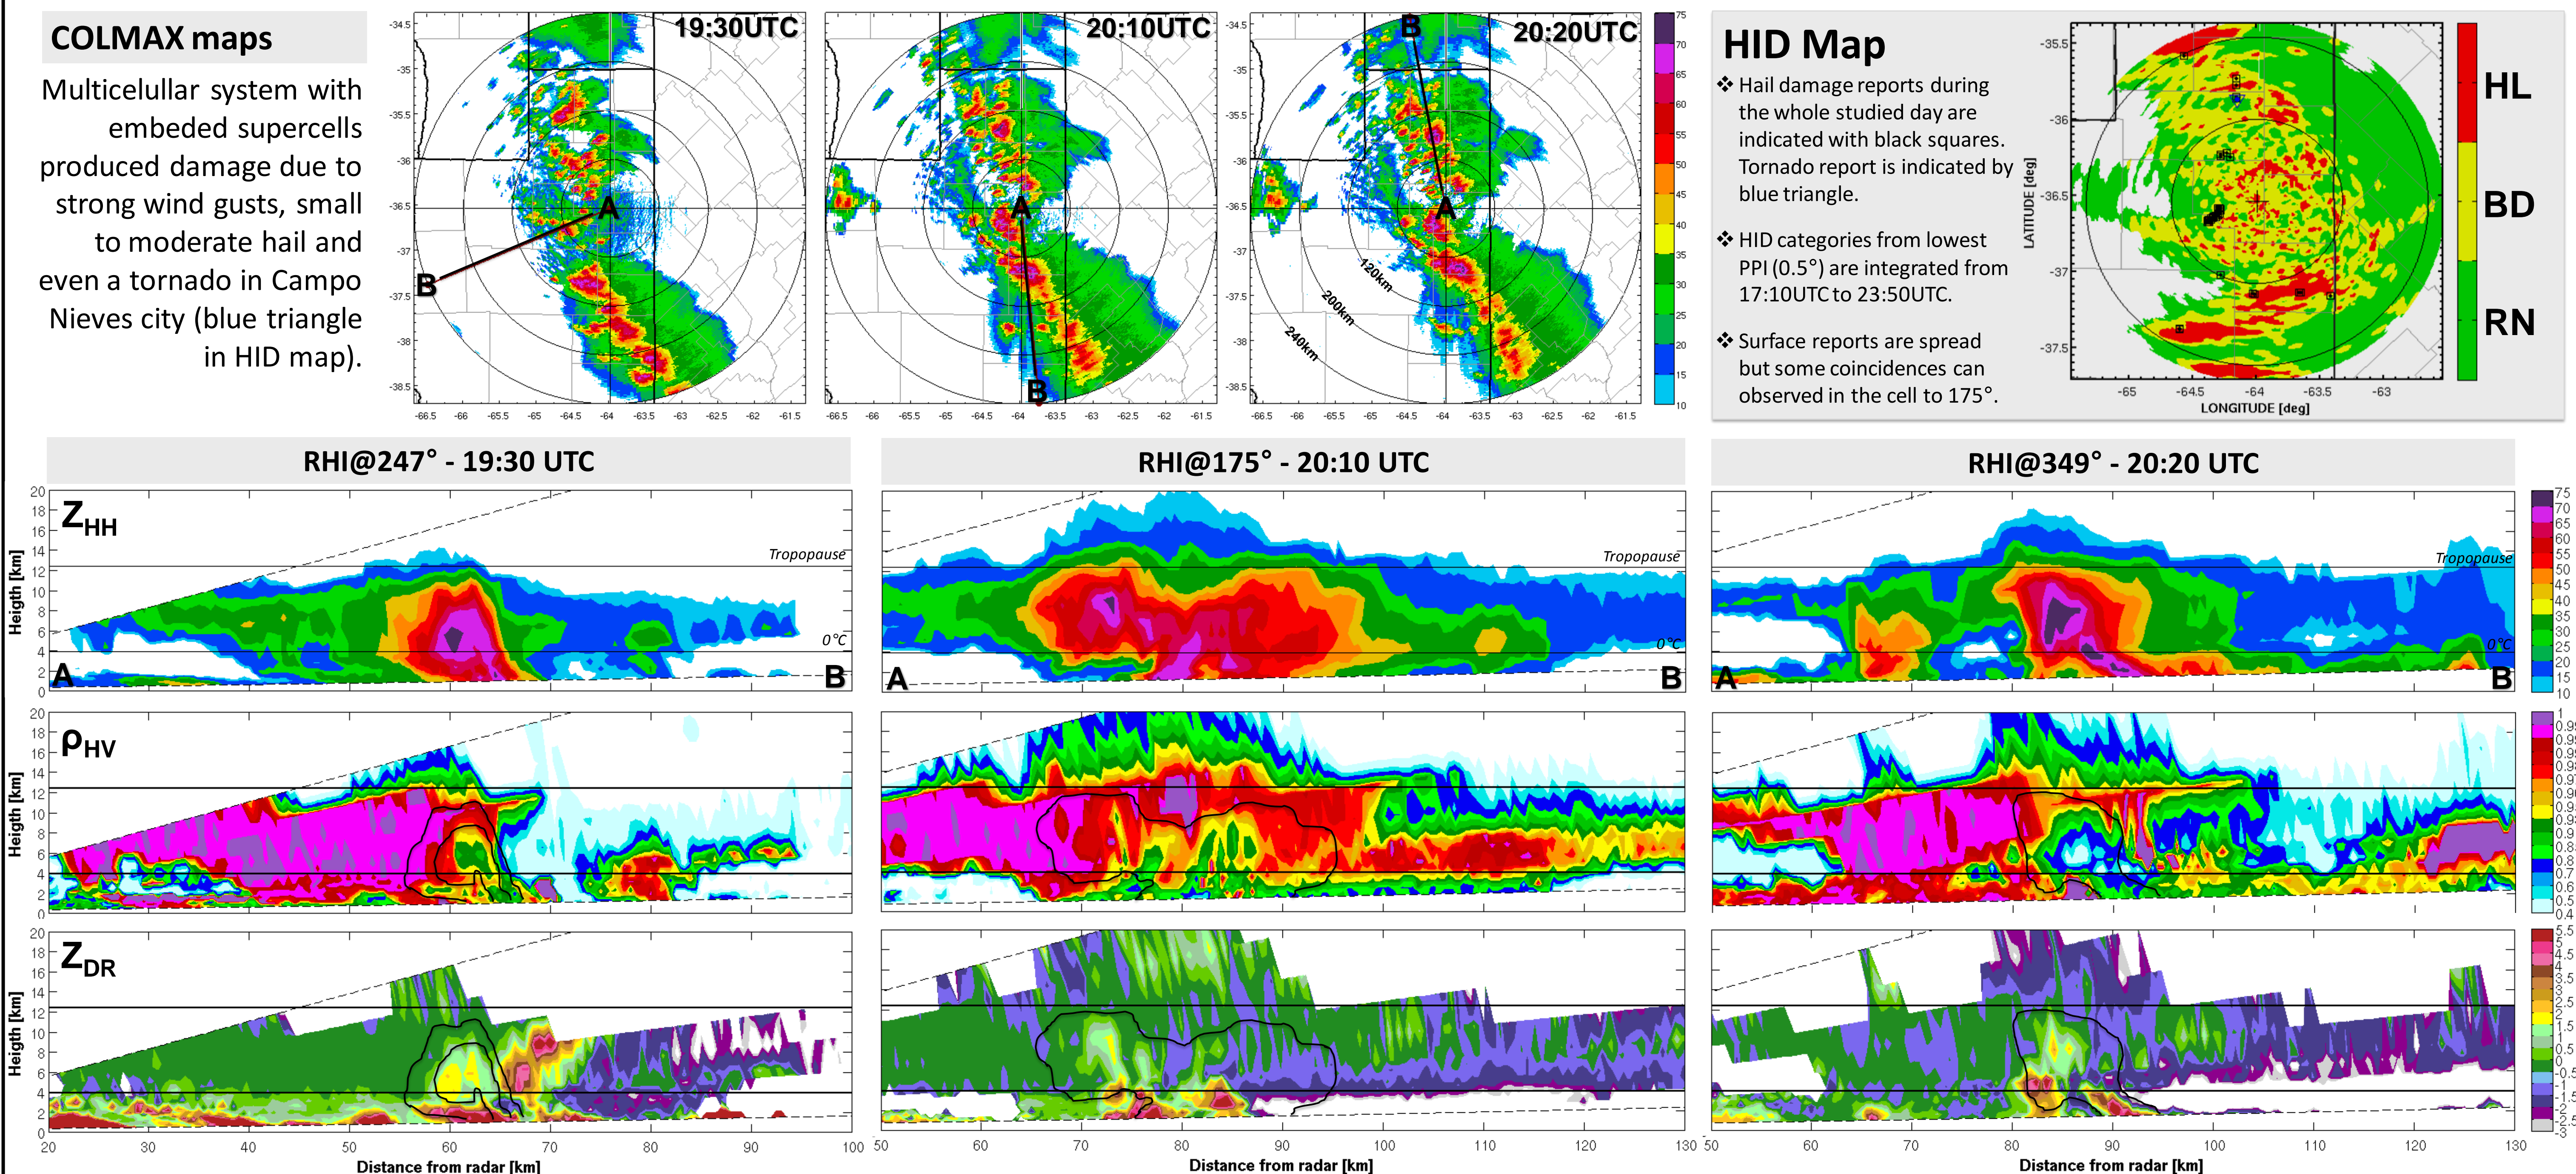

6. Hailstorm 15 January 2011

COLMAX maps

Discrete supercell thunderstorms produced damage due to strong wind gusts, large hail and even two tornadoes in Winifreda and Macachin (blue triangle in HID map).

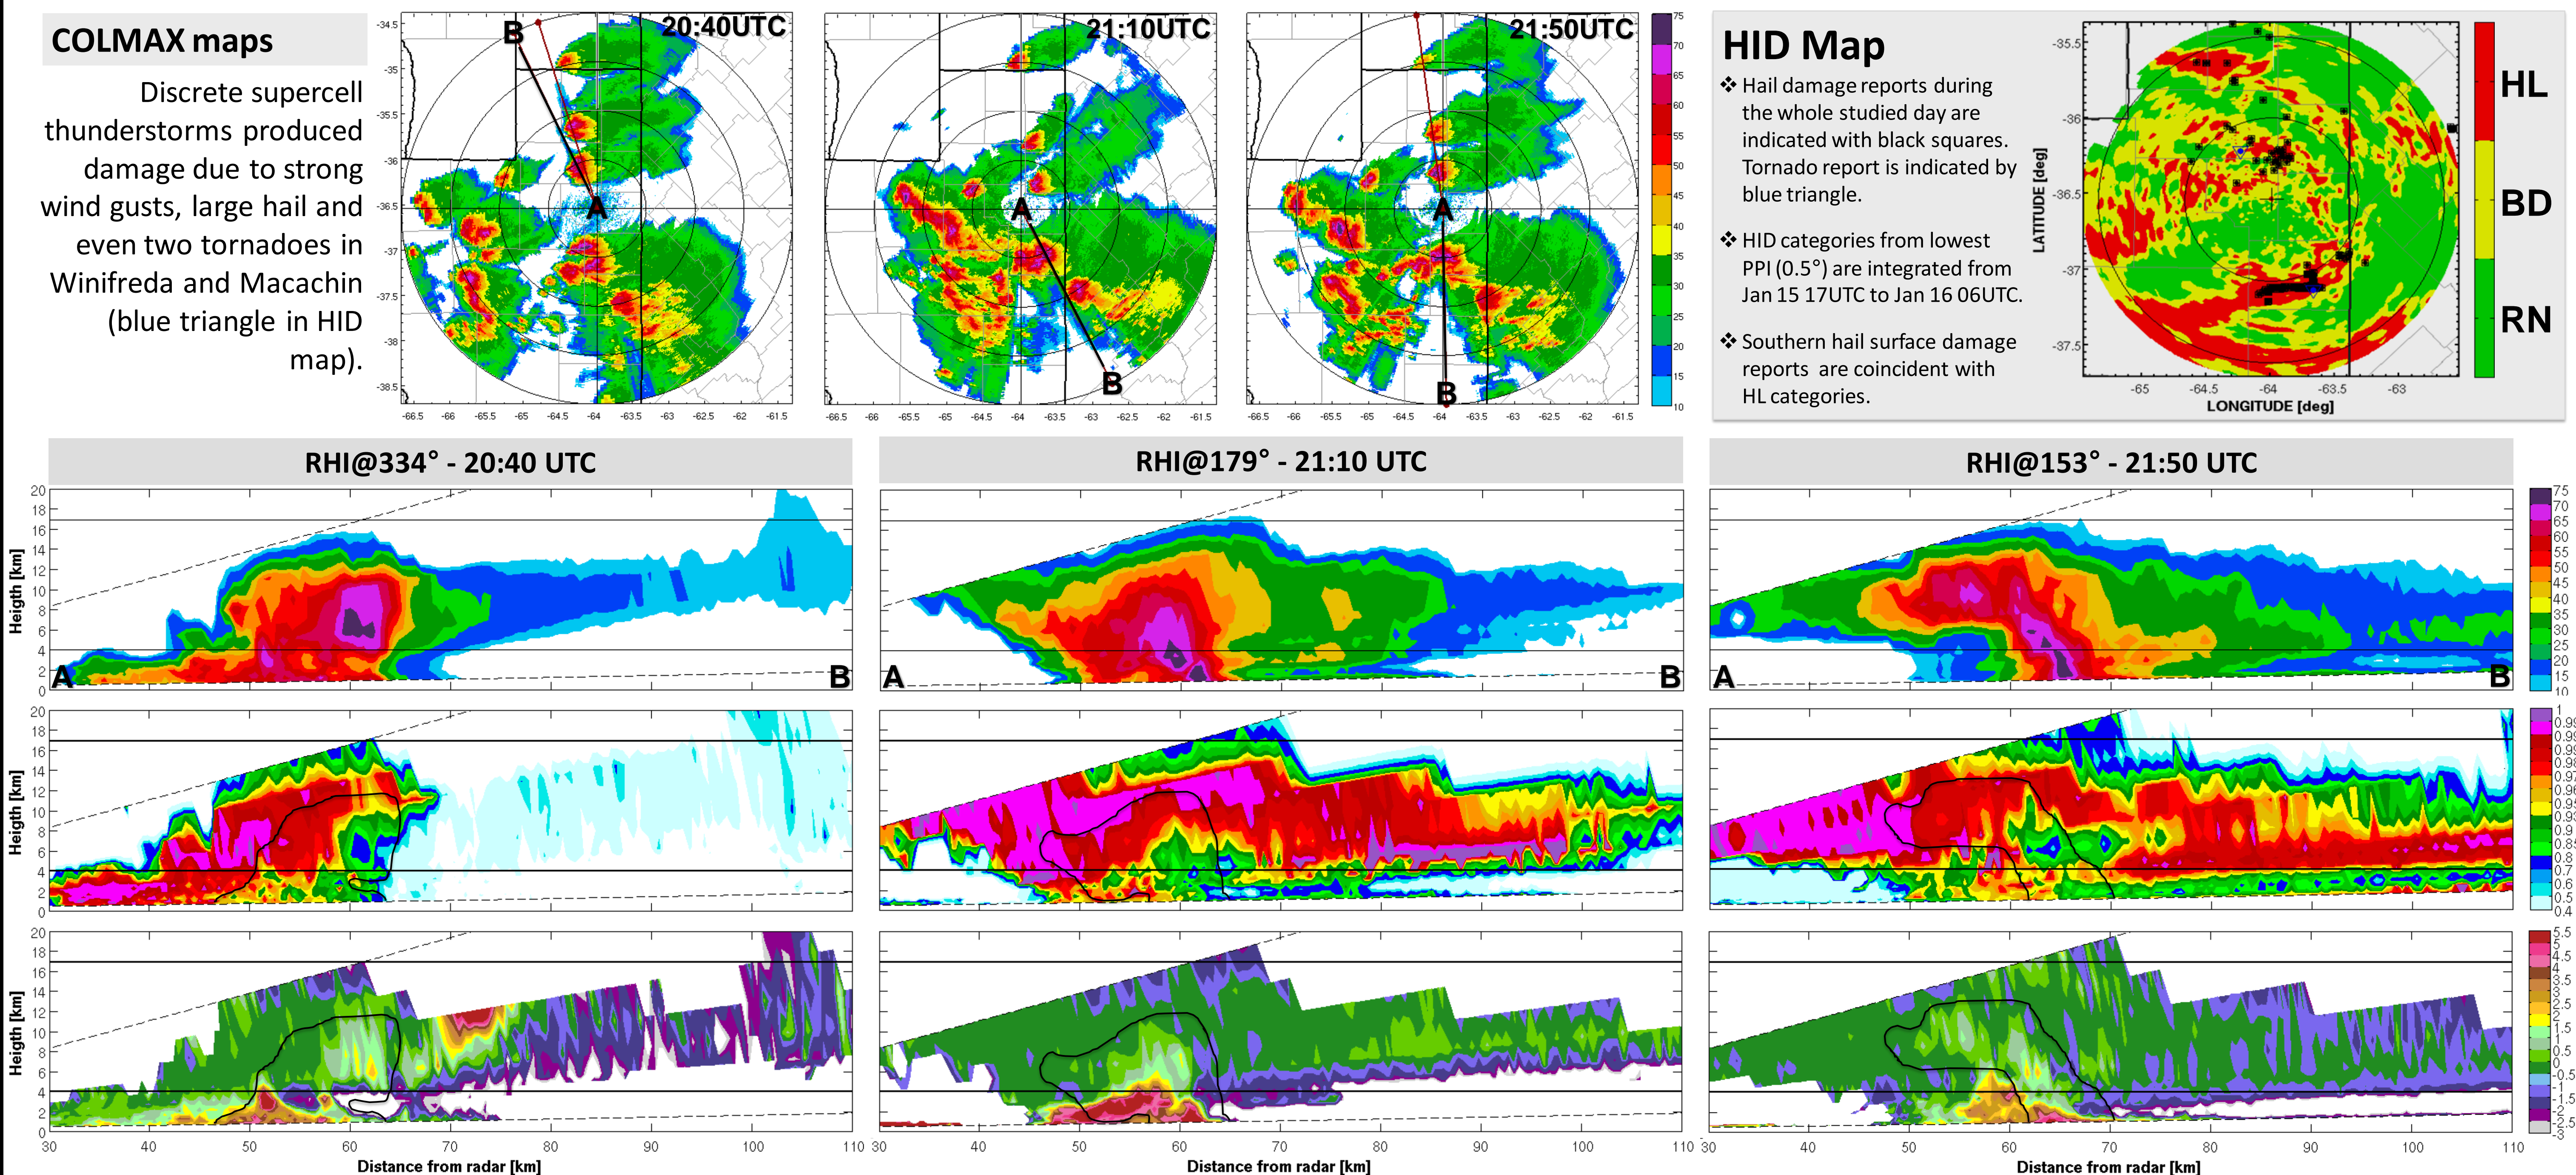

7. Conclusions

- ✓ C-band dual polarimetric radar signatures over large melting hail near the surface (average egg sized 5 cm) are typically characterized by high Z_{HH} (>55 dBZ), high Z_{DR} (38 dB), and low ρ_{HV} (<0.8) at low levels.
- ✓ High Z_{DR} and low ρ_{HV} values be can explained by melting of resonant sized hailstones and a mixture of hydrometeors near the surface (Kaltenboeck and Ryzhkov, 2012, Anderson et al. 2011)
- ✓ Low Z_{DR} (~ 0 dB) and ρ_{HV} (<0.8) inside a high Z_{HH} core (> 55 dBZ) above melting layer could be associated with tumbling dry hail and graupel.
- ✓ Analyzed storms show in both cases a bounded weak echo region, an overhang ZHH maximum and three body scattering signature over these supercell cases.
- ✓ Previous mentioned evidence and surface reports corroborate the presence of severe hail in the studied cases.
- ✓ HID shows a adequate performance over the studied storms but progress must be made in severe weather reports database in order to have information at higher spatial and temporal resolution.
- ✓ Strong attenuation and differential attenuation in the C-band will be explored in future work in order to consider Φ_{DP} and K_{DP} as another fuzzy logic variable.

8. Acknowledgments

This research is supported by PICT 20131299, UBACyT 2013201620020130100618BA, ALERTAR. Radar information used in this paper was provided by National Agriculture Technology Institute (INTA) and hail reports was provided by Sancor Seguros and La Dulce Cooperativa de Seguros. Special thanks to Dr. Jan Handwerker from Institute of Meteorology and Climate Research, Karlsruhe Institute of Technology (KIT), for kindly providing the routine that read Gematronik radar data.

9. References

- Baldini, L., E. Gorgucci, V. Chandrasekar, and W. Petersen, 2005: Implementations of CSU hydrometeor classification scheme for C-band polarimetric radars. *32nd AMS Conf. on Radar Meteorology*, Amer. Meteor. Soc., Albuquerque, N.M.
- Dolan, B., and S. A. Rutledge, 2009: A theory-based hydrometeor identification algorithm for X-band polarimetric radars. *J. Atmos. Oceanic Technol.*, **26**, 2071-2088.
- Dolan, B., S. A. Rutledge, S. Lim, V. Chandrasekar, and M. Thurai, 2013: A Robust C-band Hydrometeor Identification Algorithm and Application to a Long Term Polarimetric Radar Dataset. *J. Appl. Meteor. Climatol.*, **52**, 2162-2186.
- Kaltenboeck, R., and A. Ryzhkov, 2012: Comparison of polarimetric signatures of hail at S and C bands for different hail sizes. *Atmos. Res.*, **123**, 323-336.