

Kenneth Holmlund  
EUMETSAT, Darmstadt, Germany

## 1. INTRODUCTION

The European geostationary satellite Meteosat will within roughly a year be replaced by Meteosat Second Generation (MSG). The key Meteosat products that are also derived with MSG are the Atmospheric Motion Vector (AMV) field products. MSG will provide imagery data every 15-min. over the visible portion of the Earth with a sampling distance of 3 km enabling an improvement in the quality of the derived vectors. Furthermore MSG will observe the atmosphere in several spectral bands, amongst others two water vapor absorption channels at 6.3 and 7.2  $\mu\text{m}$  and a  $\text{CO}_2$  absorption channel. These channels will for the first time operationally enable the application of the IR/WV and IR/ $\text{CO}_2$  ratioing methodologies simultaneously, thus providing more accurate estimates of the cloud heights. Further new channels like the 3.9  $\mu\text{m}$  channel and High Resolution Visible channel at 1 km resolution are expected to improve especially the tracking of low-level clouds.

The new capabilities of MSG have also initiated the development of a new generation of AMV retrieval algorithms. This paper will present the MSG AMV extraction scheme especially high-lighting the changes with respect to the current Meteosat AMV scheme and the expected areas of improvements. Results demonstrating the capabilities of the new AMV retrieval scheme with data from existing geostationary satellites are also presented.

## 2. THE METEOSAT SECOND GENERATION

Meteosat Second Generation (MSG) is a spin-stabilized satellite in geosynchronous orbit. The spin rate is 100 rpm and with the new SEVIRI instrument the satellite will provide global imagery every 15-min. The sampling distance of SEVIRI is 3 km (1 km for High-resolution visible (HRVIS) data) and the radiometric resolution is 0.25 K. Figure 1 presents the EBBT as observed at the top of the atmosphere for Mid-latitude summer together with the infrared spectral band coverage of the MSG SEVIRI instrument. As a comparison the spectral coverage of the GMS-5 (Geostationary Meteorological Satellite, maintained by the Japan Meteorological Agency), GOES-8 (Geostationary Operational Environmental Satellite, maintained by National Oceanographic and Atmospheric Administration/National Environmental Satellite, Data and Information Service) sounder and GOES-8 imager are included.

*Corresponding author address:* Kenneth Holmlund, EUMETSAT, Am Kavalleriesand 31, 64295 Darmstadt, Germany; e-mail: holmlund@eumetsat.de.

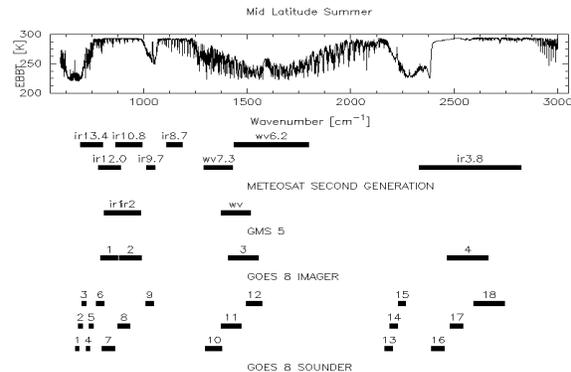


Figure 1. The EBBT as observed at the top of the atmosphere for Mid-latitude summer together with the infrared spectral band coverage of the MSG SEVIRI as well as the GMS-5, GOES-8 sounder and imager.

Table 1 presents the current baseline channels for AMV extraction. The table also incorporates an extended set of channels that are highly likely to provide significant and improved data, but for which there is currently no experience. It is foreseen that the AMV-products derived from these channels are not declared operational at Day-1 (First day of operational dissemination), but at a later stage when a complete validation and assessment of the quality of the derived vectors has been performed.

Table 1. The AMV channels and target type. HLC, MLC and LLC refer to high, medium and low-level clouds, respectively.

Baseline channels:		
Band	Central wavelength	Prime targets
IR	10.8 $\mu\text{m}$	Clouds
IR	6.2 $\mu\text{m}$	HLC/Moisture
IR	7.3 $\mu\text{m}$	HLC/MLC/Moisture
VIS	0.6 $\mu\text{m}$	LLC over sea
VIS	0.8 $\mu\text{m}$	LLC over land
Extended channels:		
IR	9.7 $\mu\text{m}$	Clouds/ozone
IR	3.9 (8.7) $\mu\text{m}$	LLC at night
HRVIS	0.8 $\mu\text{m}$	LLC over sea

## 3. THE ATMOSPHERIC MOTION VECTOR EXTRACTION SCHEME

The Atmospheric Motion Vector (AMV) extraction scheme will in general retrieve the AMVs in a similar fashion to the current operational extraction scheme at EUMETSAT (e.g. Schmetz et. al., 1993, Buhler and Holmlund, 1993). The main components are the following; 1) Target extraction; 2) Image enhancement; 3) Tracking ;4) Height Assignment; 5) Quality control.

In the following sections several examples are presented. These are based on the new AMV extraction scheme, currently employed at EUMETSAT for development and verification purposes. This system is able to digest various kinds of image data and for these examples simulated MSG data has been used. The simulated data is based on calibrated Meteosat-6 IR, WV and VIS data that has been re-sampled to the MSG SEVIRI resolution.

### 3.1 Target extraction

The main major change to the current operational AMV extraction scheme at EUMETSAT is the target extraction. Currently the AMVs are extracted on an equidistant grid (baseline 32\*32 pixels) with a target size equivalent to the grid size. In the new scheme the target size and extraction grids are controlled separately. Furthermore the exact location of the target is not fixed and centered at the grid location but optimized in a search area around the grid-location. The main two reasons for this approach are; 1) Better and more stable targets for tracking, e.g. the target area contains at least a certain minimum amount of the clouds at the highest level locally and 2) Avoidance of extraction of targets in multi-layered cloud situations that have proven to be difficult to handle. These conclusions were already indicated by Holmlund (1995) and by the necessity to introduce complex image enhancement procedures (Hoffman, 1990). A variable target extraction scheme is already used operationally at NOAA/NESDIS and has proven to be reliable (e.g. Nieman et. al., 1997). The EUMETSAT target extraction scheme investigates the following features of each location:

- Contrast
- Local standard deviation
- Number of pixels with high local standard deviation
- Entropy
- Cloud configuration
- Land/Sea (water) distribution
- Overlap control

Suitable targets are typically targets that have the highest contrast and largest amount of standard deviation (highest entropy) within the optimization area. Furthermore multilayered cloud situations should be avoided and a minimum amount of cloudy/clear sky pixels are required for respective target type. Coastal regions are avoided in the IR and VIS channel, as the coastal feature might have an impact on the tracking. Finally the overlap between targets is restricted in order to avoid vectors to be derived that contain a large amount of pixels from the same cloud (clear sky feature). This will minimize the impact of correlated errors by reducing the horizontal dependency between neighboring targets. Currently the baseline overlap is limited to 30 %

Figure 2 shows the impact of the variable target extraction. In order to visualize the performance of the location optimization a low-density grid was used. It can

be seen in figure 1 that the target locations are preferably extracted along strong gradients in the coldest parts of the satellite imagery data.

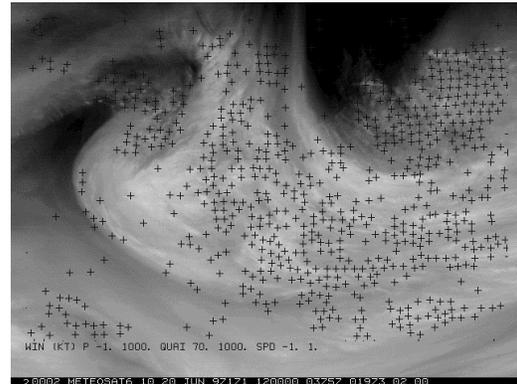


Figure 2. Low-density targets extracted from MSG water vapor data simulated by data from Meteosat-6.

### 3.2 Image enhancement

The image enhancement is equivalent to the current methodologies applied at the Meteorological Product Extraction facility (MPEF) for the current Meteosat-satellites (Schmetz et. al., 1993). The only important difference is the derivation of mean radiances of identified scenes used in the image enhancement. In the current operational scheme the mean radiances are based on a multi-dimensional histogram analysis. For MSG pixels in the target area will be clustered and averaged according to the results from a pixel based multi-channel analysis scheme.

### 3.3 Tracking

The tracking of the targets is generally the task that uses the largest amount of computer resources in any AMV extraction scheme. Therefore several various alternatives have been explored in order to minimize the computational load. Generally the following methodologies have been employed; 1) Use of additional data for first guess estimates of the displacements; 2) In cases where several consecutive vector fields are derived the search area is after the initial matching reduced for any subsequent derivation; 3) Sequential derivation of matching surfaces with full surface calculated only at locations indicated by a low resolution matching surface. The first approach is often relying on NWP data and is therefore not recommended as flow with a large discrepancy to the NWP field might not be derived correctly. The second approach is better introduces however some limitations on the timely variation on the vectors and is implicitly invoking a quality control (by limiting the search area) that preferably is performed at a later stage. The third alternative is generally the most promising and for current satellite data and resolution it has been shown that the results are agreeing up to 97% of a full matching surface. As the available processing capacity has in the past years increased tremendously the

requirement for a limited calculation of matching surfaces has decreased and therefore the calculation of the full matching surface was regarded to be feasible. Three basic matching methods have been implemented 1) Cross-correlation in the time domain, 2) Cross-correlation in the Fourier domain and 3) Sum of Squared Distances. The detailed description of the implementation of these methods is given in Dew and Holmlund (2000). Figure 3 shows an example of a water vapor vector field derived with the current software version using simulated MSG image data.

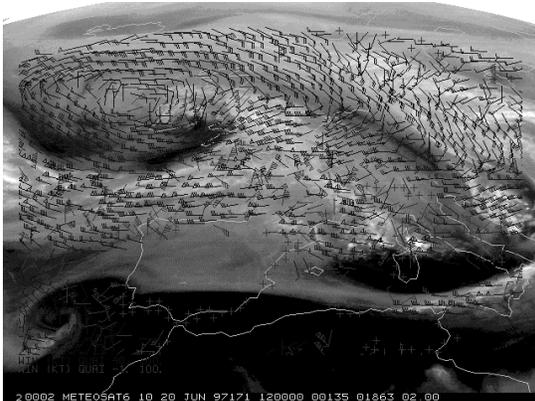


Figure 3. Water vapor vector field with water vapor imagery data from 20 June 1997.

### 3.4 Height assignment

The height assignment of AMVs is currently the most challenging task in the AMV extraction schemes. Broken clouds, multi-layered cloud targets, low level targets (requiring cloud base height assignment) and height assignment of clear sky targets, do all require their special attention. The biggest problems however are generally encountered with semi-transparent clouds.

With the advent of MSG it will for the first time be possible to operationally derive the correct height for semi-transparent clouds using two operationally established methodologies simultaneously; the semi-transparency correction utilizing the WV and IR channel (e.g. Schmetz 1993) and the CO<sub>2</sub>-ratioing method (Eyre and Menzel, 1989, Nieman et. al. 1997). Nieman et. al. (1993) showed that for high level clouds the mean pressure difference of the estimated cloud height is of the order of 20 hPa and the RMS difference is ca 80 hPa between the two methods. The implementation of these methods contains the following new features:

- channel dependant noise is included in the calculations
- refined selection of pixels or groups of pixels depending on the characteristics of the pixels and the neighboring pixels
- various possibilities to extract background/surface information (real observations, history of previous observations, forecast, climatology)

Figure 4 presents an example of extracted IR vectors with their respective height over the South Atlantic. The delineation between high (above 400 hPa) (dark gray), medium (between 440 and 700 hPa) (black) and low (below 700 hPa) level vectors (light gray) looks realistic and has been verified against operational heights derived from Meteosat-6 data. It should be noted that as these results are based on simulated MSG data based on the Meteosat-6 IR, WV and VIS data, no CO<sub>2</sub>-channel is present and therefore only the semi-transparency correction method has been applied to the thin high level clouds.

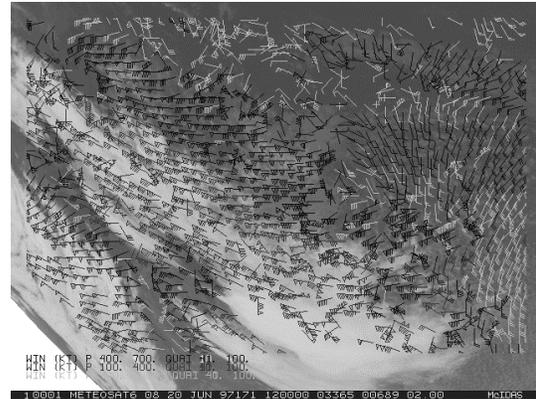


Figure 4. AMVs derived from simulated MSG images over the South Atlantic. The image data has been simulated from Meteosat-6 data from 20 June 1997 1200 GMT. High (above 400 hPa) level vectors are in light gray, medium (between 400 and 700 hPa) level vectors in black and low level (below 700 hPa) vectors in light gray.

### 3.5 Automatic quality control

The automatic quality control is based on the same principals currently used operationally (Holmlund, 1998). The scheme has been further improved with latest experiences with current operational AMVs and the new capabilities provided by MSG. The baseline Automatic Quality Control (AQC) tests are based on:

- local consistency (horizontal)
- speed consistency (in time)
- direction consistency (in time)
- vector consistency (in time)
- background consistency (currently against NWP)
- inter-channel consistency

The extraction cycle of the baseline AMV product consists for MSG of three vector fields. All vector fields contribute to the consistency calculations enabling a better estimation of the vector reliability.

### 3.6 Final product

The AMV fields can be derived continuously, however the current baseline is that a final product should be extracted once every hour. The baseline

product derivation is therefore set up to extract three intermediate AMV fields from four consecutive images during one hour. The targets are extracted from the first image in the sequence and are then followed in time throughout the other three images. The final vector components (speed, direction, height, temperature and quality) are based on a weighted mean of the intermediate vectors. The current baseline is however that the intermediate fields all have the same weight.

## 4. DEVELOPMENT APPROACH

### 4.1 Pre-launch activities

The development of the MSG MPEF AMV scheme is based on previous experience with the Meteosat-satellites. It further incorporates the knowledge gained at the previous International Winds Workshops (e.g. IWWS 5) as well as information exchange during co-operation amongst the various AMV extraction centers. Finally results from various studies have been incorporated as well as in-house development activities. The development of the operational software has been given to industry and is based a formal Algorithm Specification Document and on in-house prototyping of all essential parts. The performance of the prototype code has been verified with comparisons against not only the operational extraction schemes but also with detailed case studies

### 4.2 Post-launch activities

The main goal for all activities is to ensure that the derived software is capable to produce from the first day of operations products that are at least as good as the current operational products. As MSG incorporates a completely new instrument with new channels and performance the tuning of the configuration parameters will be an essential activity. Therefore it is foreseen that during commissioning of the satellite an early access to image data is granted to the MSG MPEF in order to tune all algorithms (not only the AMV-scheme). The use of real MSG data is also likely to identify possible problems in the software implementation and might also identify some shortcomings in the current baseline methodologies. The MSG MPEF is designed to be modular such that it will be possible to incorporate new software modules or to replace existing modules with improved modules if necessary.

## 5. CONCLUSIONS

The Atmospheric Motion Vector (AMV) extraction scheme for Meteosat Second Generation (MSG) has been introduced. The new scheme is based on well-established operational algorithms enhanced with new concepts utilizing the foreseen new capabilities of the satellite. It is expected that the AMVs will be extracted in up to 7 image channels, with a target size of 80 km and an extraction grid of 50 km. The vectors will be disseminated hourly over the GTS. With the new capabilities of MSG it is expected that the quality of the

AMV-products will improve, especially with respect to height assignment due to the new channels (especially the CO<sub>2</sub>-channel). The launch of MSG is currently expected in mid 2001.

## 6. REFERENCES

- Buhler Y. and K. Holmlund, 1993: The CMW Extraction Algorithm for MTP/MPEF. *Proc. Second Int. Winds Workshop*, Tokyo, Japan, 205-217.
- Dew, G. and K. Holmlund, 2000: Investigations of Cross-Correlation and Euclidian Distance Target Matching Techniques In the MPEF Environment. *Proc. Fifth Int. Winds Workshop*, Lorne, Australia, EUMETSAT, 235-243.
- Eyre J. and P. Menzel, 1989: Retrieval of Cloud Parameters from Satellite Sounder Data: A Simulation Study. *J. Appl. Meteor.*, **28**, 267-275.
- Hoffman, J., 1990: The Use of Spatial Coherence Method for Cloud Motion Wind retrieval. *Proc. 8<sup>th</sup> Meteosat Scientific users Meeting*, Norröping, Sweden, EUMETSAT EUM P 05, 97-100.
- Holmlund K., 1995: Half Hourly Wind Data From Satellite Derived Water Vapour Measurements. *Adv. Space Res.*, **16**, (10)59-(10)68.
- Holmlund, K., 1998: The Utilization of Statistical Properties of Satellite-Derived Atmospheric Motion Vectors to Derive Quality Indicators. *Wea. Forecasting*, **13**, 1093-1104.
- IWWS 5, 2000: *Proc. Fifth Int. Winds Workshop*, Lorne, Australia, EUMETSAT, 298 pp.
- Kelly, G., 1993: Numerical experiments using Cloud Motion Winds at ECMWF, *Proc. On Developments in the use of Satellite Data in Numerical Weather Prediction*, Reading, UK, ECMWF, 331-348.
- Nieman S. J., Schmetz J. and W. P. Menzel, 1993: A Comparison of Several Techniques to Assign Heights to Cloud Tracers. *J. Appl. Meteor.*, **32**, 1559-1568.
- Nieman, S.J., W. P. Menzel, C. M. Hayden, D. Gray, S. T. Wanzong, C. S. Velden, J. Daniels, 1997: Fully Automated Cloud-Drift Winds in NESDIS Operations, *Bull. Amer. Meteor. Soc.*, **78**, 1121-1133.
- Schmetz J., K. Holmlund, J. Hoffman, B. Strauss, B. Mason, V. Gärtner, A. Koch and L. van de Berg, 1993: Operational Cloud-Motion Winds from Meteosat Infrared Images. *J. Appl. Meteor.*, **32**, 1206-1225.