

DEVELOPMENT OF AUTOMATED ANALYSIS AND FORECAST PRODUCTS
FOR ADVERSE CEILING AND VISIBILITY CONDITIONS

Paul H. Herzegh^{*1}, Stanley G. Benjamin²,
Roy Rasmussen¹, Ted Tsui³, Gerry Wiener¹, Peter Zwack⁴

¹National Center for Atmospheric Research, Boulder, CO 80307

²NOAA/ERL/FSL, Boulder, CO 80305

³Naval Research Laboratory, Monterey, CA 93943

⁴University of Quebec at Montreal, Montreal, CN H3C 3P8

1. INTRODUCTION

Ceiling and visibility (C&V) conditions near the earth's surface are controlled through a complex balance of meteorological phenomena. Key among these are (i) the formation and evolution of fog, low cloud, and precipitation, and (ii) humidity, haze and aerosol effects. Diverse seasonal and geographic influences further modulate these controls, making C&V phenomena an extremely challenging analysis and forecast problem. The operational importance of that problem, however, is underscored by the serious negative impacts that adverse C&V conditions bring to the safety and efficiency of aviation operations and surface transportation.

Adverse C&V conditions are cited as a contributing factor in over 35% of all weather-related accidents in the U.S. civil aviation sector¹. Over the period 1989 through 1998, these hazards claimed the lives of 1,685 people (averaging 168 per year) within the U.S. general aviation and charter/air taxi communities¹. Though the numbers may vary from year to year, many other passengers and crew are subjected to sudden, untenable risk through inadvertent encounters with adverse C&V conditions, and thousands more are disrupted by the inherent uncertainty in C&V forecasting and communication at the current state of the art.

The National Ceiling and Visibility (NCV) research and development program outlined here was established in March 2001 to help address the aviation safety impacts outlined above. The effort is anchored by the programmatic focus and support of the FAA's Aviation Weather Research Program (AWRP), whose recent work is described in this volume by Kulesa *et al.* (2003). The NCV program explores the use of observations, numerical modeling, computer automation, and targeted research into key problems in C&V phenomenology. The program grew from the foundation laid by a highly successful joint development effort sponsored by FAA/AWRP, NASA, and the Naval Research Laboratory.

The impact of adverse C&V conditions on the viability and safety of military aviation can be severe as well, particularly where low-altitude stealth, search and rescue, carrier operations, and remotely-piloted operations are involved. Advantageous leveraging between NCV and the Naval Research Laboratory at Monterey

(NRL) makes use of shared interests and complementary research expertise of benefit to both civil and military aviation.

In addition to the safety impacts cited above, adverse C&V conditions can strongly reduce the efficiency of terminal area traffic flow. AWRP's companion Terminal Ceiling and Visibility (TCV) program addresses means to minimize that reduction in efficiency and serves as an important collaborator for NCV.

2. DEVELOPMENT STRATEGY OVERVIEW

Current operational C&V forecasts are typically communicated through routine area forecasts (FAs), related AIRMET bulletins focused toward small aircraft, terminal area forecasts (TAFs), and through commercially-available meteorological briefing services. These sources serve an important function, and at the same time leave needs and opportunities that automated tools, frequently updated gridded products, and web-based display can help address.

NCV initially conceives and supports two product families:

- Gridded analyses of current ceiling, visibility and flight category conditions at the RUC forecast model native grid resolution (currently 20 km) and ready access to supporting interactive data overlays providing additional information if needed or desired. The concept here is to provide rapid (15 min) updates of current C&V conditions in graphical form while incorporating tools that allow concurrent examination of METARs, TAFs, AIRMETs, and satellite and NEXRAD imagery.
- Gridded 1-12 h forecasts of ceiling, visibility and flight category. The NCV forecast product is formulated as a consensus among a variety of parallel forecast techniques comprised of numerical modeling and observations-based approaches. The forecast product is updated hourly.

NCV products are targeted for operational use directly by the flight service station briefer, pilot, dispatcher, controller, and other end-user. Since automation is key to enabling frequent product updates and round the clock operation, our work relies upon unattended, computer-aided techniques. These include (i) expert system methods to conditionally manipulate data inputs and manage functional interactions among them, and (ii) fuzzy logic techniques to formulate a consensus product (e.g., analysis, or forecast), generally based upon the selective merging of individual data and product sub-elements.

* *Corresponding author address:* Paul H. Herzegh, NCAR, P.O. Box 3000, Boulder, CO 80307; Email: herzegh@ucar.edu

¹ Based upon information drawn from the National Transportation Safety Board Accident Database.

3. OBSERVATIONS AND THE ANALYSIS PRODUCT

The challenge of C&V forecasting begins with the difficulty of observing and representing present conditions. The analysis of present conditions given by the current NCV prototype continental U.S. (CONUS) product is illustrated in Fig. 1.

A variety of factors come into play in accommodating best use of C&V observational data, and we summarize several of the key issues here:

- Ceiling and visibility observations are essentially distributed point (or small area) samples, and this leaves large areas between METAR surface reporting sites or other operational measurement sites essentially unobserved.
- The behavior of both ceiling and visibility demonstrates high spatial and temporal variability in many situations. Thus, the conditions across unobserved (or under-observed) regions can vary dramatically, and variable conditions within those unobserved regions can be critical to a meaningful representation of C&V on a regional scale.
- Terrain influences can induce very strong influence on C&V through the occurrence of features such as low valley fog, capping mountain cloud, etc.
- Area measurements such as satellite imagery, while critically important, cannot currently define or resolve ceiling or visibility outright. Satellite observations *do* offer means to crosscheck, edit or improve upon certain aspects of surface observations, however. For example, cloud free conditions above and around a METAR reporting station yield reason to take the ceiling at that point and time as 'unlimited' even though the station itself would likely report a 12K' ceiling based on ceilometer measurements.

To improve the representativeness of our prototype analysis product, we plan the sequence of automated processing and analysis steps outlined schematically in Fig. 2. New elements of that process not yet implemented are outlined in the four items below:

Supplementary Observations.

To maximize the quality and number of surface observations we plan to augment official METAR surface data with that from real-time state or local networks as available. This effort requires careful attention to quality control of the non-METAR data and understanding of all aspects of the instrumentation in use. It is clear that some (perhaps many) of the non-METAR data available may be unacceptable due to uncertain quality control or poor instrument performance, and these data must be rejected to assure that they do not diminish the impact and quality of the primary METAR data.

Gap Filling.

The analysis process will utilize IR and visible satellite data and NEXRAD data to help fill or partially characterize the 'gaps' between METAR or other surface observing sites. While the satellite and NEXRAD information will not be sufficient to unambiguously establish conditions within the gaps, in many cases it should enable improvement in the representativeness of interpolated data in the gap area. The GOES low cloud

product, for example, could potentially be useful in this application.

Improved Interpolation.

The high-resolution analysis grid is populated by data interpolated from METAR sites. The interpolation procedure itself is important to preserving the METAR information with minimal alteration or distortion. Our concept for improved (or smart) interpolation follows from the work of Forsythe et al. (2000), who showed that an interpolation procedure for cloud base height

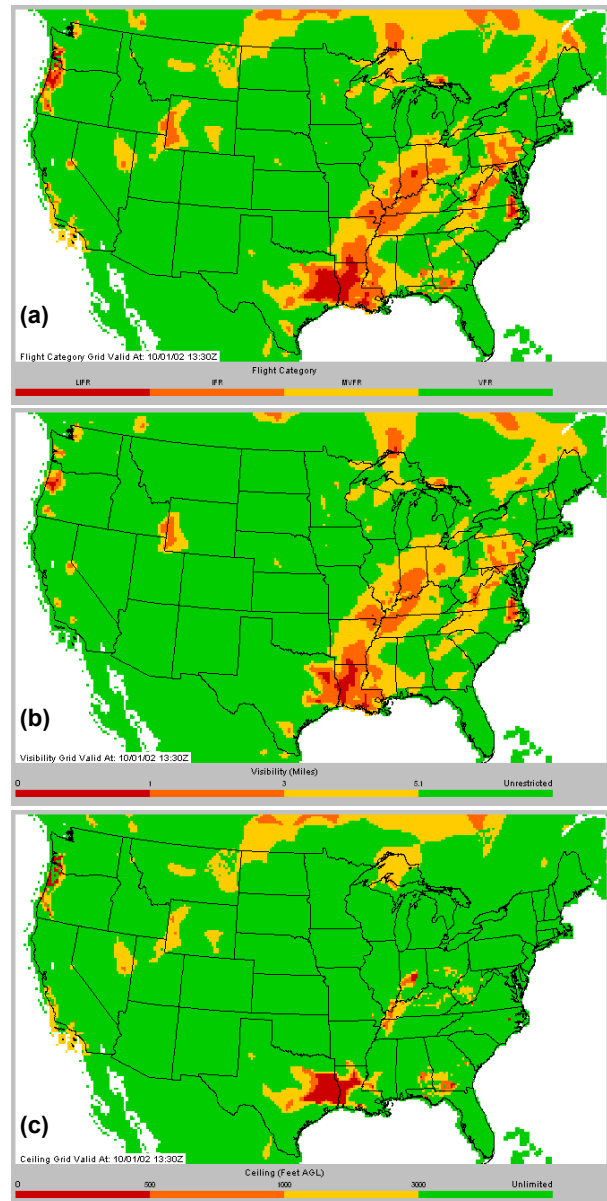


Figure 1. Current conditions as given by METAR reports analyzed by the NCV automated system on 1 October 2002. (a) Flight Category (Low IFR, IFR, Marginal VFR and VFR) as determined from the values in (b) and (c). (b) Visibility in statute miles. (c) Ceiling in K' AGL. Prototype display is continuously accessible at www.rap.ucar.edu/projects/cvis/index.html.

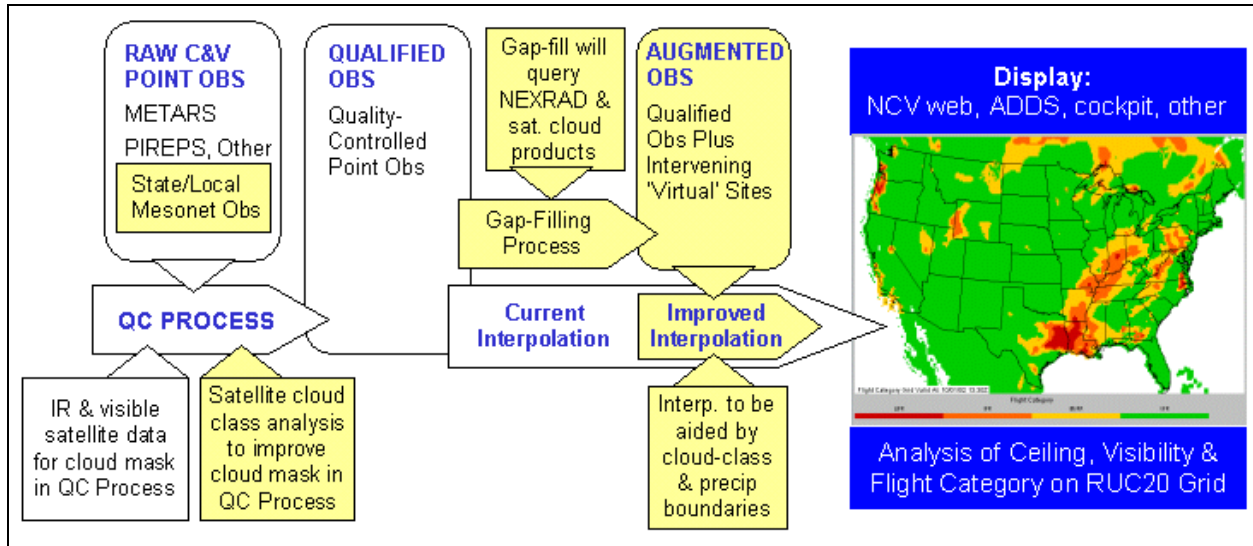


Figure 2. Schematic representation of NCV point observation analysis system components in use today (white) and those planned for future use (shaded yellow). Input data are shown in the box at upper left. Processing steps are shown by arrows from left to right. The reference to ADDS at far right regards the FAA Aviation Digital Data Services website.

using interpolation pairs from within the same cloud classification field outperformed nearest-neighbor interpolation. This approach reduces the instance of interpolating across dissimilar regions. We plan to explore this form of interpolation, alternative interpolation schemes, as well as further extensions that consider other criteria such as large-scale terrain influences or possibly strong NEXRAD reflectivity gradients.

Indeterminate Conditions and Confidence Metrics.

Current practice in the prototype system is to display quantified ceiling and visibility present condition values across the full U.S. domain. However, we recognize that there are places (typically gap areas) and times when we have little information, or questionable information, on the status of current conditions. It is prudent to consider these areas as conditionally indeterminate, requiring added caution on the part of the aviation user. By definition, these regions bear cloud cover, but present unknown ceiling height and/or visibility. Thus, low ceiling and/or visibility could be present. We are exploring the information value of confidence metrics and display options to represent the occurrence of indeterminate conditions.

4. FORECAST PRODUCT COMPONENTS

The NCV plan makes use of several forecast components and techniques, and we are only at the beginning of that implementation. The key elements of the conceived forecast system are illustrated schematically in Fig. 2, which also shows the fuzzy logic-based system currently in place to weight and merge forecast information through an additive model.

Overall, the NCV strategy is anchored by the use of the RUC20 (20-km horizontal grid resolution over the CONUS), which bears a variety of improvements relative to the RUC40 that was in use prior to March 2002. Beyond this anchor, we prepare for use of several complementary forecast techniques and resources that should bring additional forecast skill in focused areas. We briefly outline these components below.

RUC20 and Eta

As described by Benjamin *et al.* (2002) and Smith *et al.* (2002), the RUC20 incorporates a variety of improvements (in resolution, model physics, data assimilation, and visibility processing) that will further refine skill related to aviation impact variables. Its rapid cycling further defines it as a key forecast input for the NCV product system. Each hour, the NCV system accepts updated 1, 3 and 6 h RUC forecast grids. In the future we expect to extend forecasts through 9 and 12 hours. That effort will await advancement in our capability to diagnose overall performance of the NCV system.

Ceiling and visibility model fields are available four times per day from the operational Eta model and are being incorporated into the NCV forecast product on a test basis. Evaluation of the forecast skill increment due to Eta use is just beginning.

COAMPS

Operational runs of the Navy COAMPS model (Hodur, 1997) are used in place of the RUC in the southern California exploratory product of particular interest to the Navy.

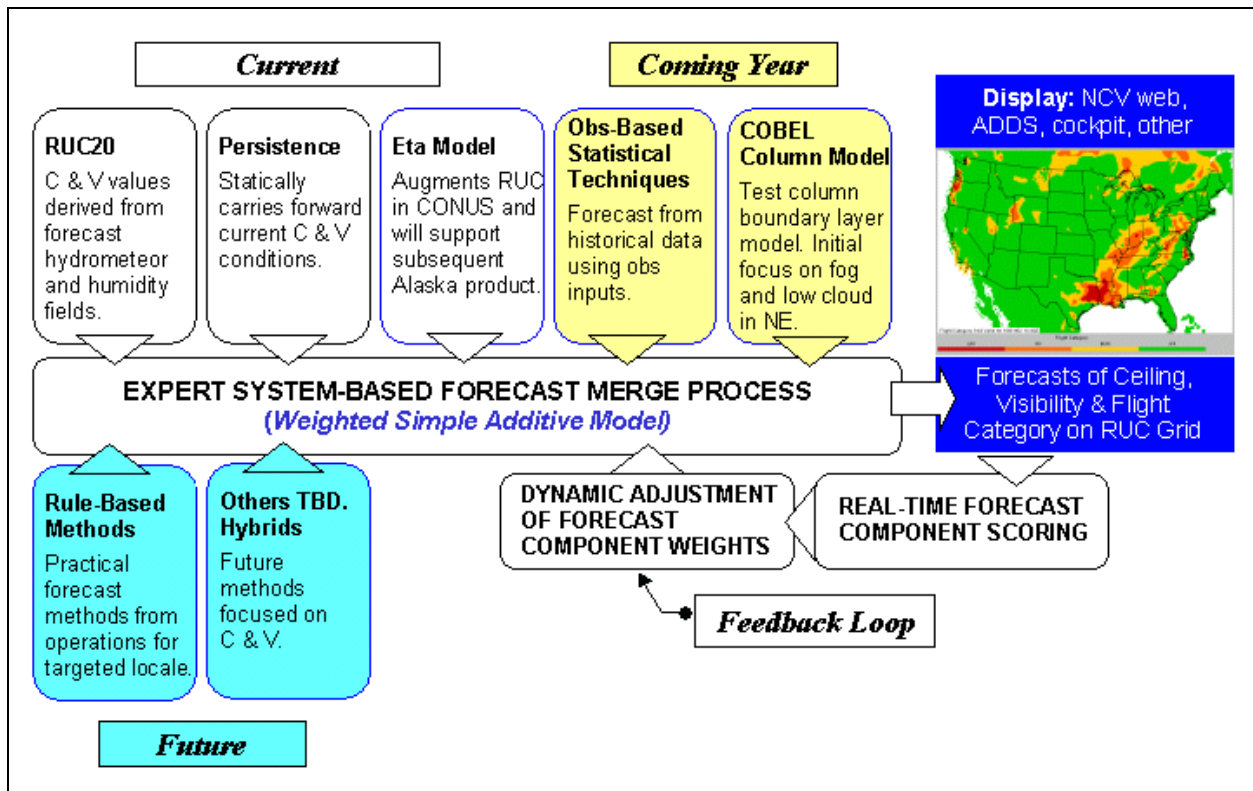


Figure 3. Schematic representation of NCV forecast system components for CONUS C&V in use today and those planned for future implementation. Forecast components flow to the expert system-based automated merging process shown at center. Real-time scoring of component forecast skill feeds back to optimize the weighting of forecast components in the automated merging process.

Persistence

In its present static form, the persistence forecast component simply carries forward current C&V conditions for each point observation site. While reasonably effective for short forecast periods, persistence of course loses skill at longer periods (3-6 h) and in rapidly changing situations. Future refinement to the persistence forecast will examine the use of temporal trends in the data to improve extrapolation to the forecast time.

COBEL Column Model

Phenomena such as fog and low stratus are closely coupled to the influence of the surface on the atmosphere, and strongly impact C&V conditions. Thus, it is highly beneficial to the forecast process to explicitly represent the radiative, microphysical and turbulent processes at work in the boundary layer (BL) with the high vertical resolution needed to capture events such as these. The COBEL 1-D column model (Guedalia and Bergot, 1994) comprises the detailed BL component of the NCV forecast system, and its integration as a real-time resource for use in selected locations is in progress. First testing of COBEL for NCV use will target the NY/NJ area and the frequent fog and low cloud events there. The model is also in use as a key element of AWRP's Terminal C&V effort toward forecasting stratus cloud impacts at San Francisco Intl. Airport.

To incorporate the influence of mesoscale forcing, COBEL implementation interfaces to RUC-derived output quantifying advection. Development effort underway to accommodate wintertime use includes implementation of the explicit mixed-phase microphysics method of Reisner et al. (1998) and corresponding addition of ice-phase radiation effects in the model. More information about COBEL is available from the University of Quebec at Montreal COBEL home page².

Observations-Based Forecasts

Probabilistic techniques offer means for rapidly updateable automated forecasts of specific conditions (e.g., low ceiling and visibility) at a specific location. The techniques use the long-term record of occurrence of the targeted condition and associated events at and near that location. Probabilistic approaches are expected to play an important role in short-term (~ 1-6 h) NCV forecasts, though the path to that role is not fully defined. Work to evaluate and apply techniques developed by the Terminal C&V program (Clark, 2002) is under way. We also examine the techniques described elsewhere (e.g., Hilliker and Fritsch, 1999, and others) and explore possible alternative methods.

² http://people.sca.uqam.ca/~tardif/COBEL/cobel_enter.htm

5. FIELD STUDIES IN THE NE CORRIDOR

Understanding of the basic phenomenology responsible for adverse C&V conditions is a key factor underlying the success of this work. We have a particularly acute need for improved understanding of the processes responsible for the formation, evolution and dissipation of fog, precipitation and low cloud. To this end, the NE Corridor Field Study is now taking shape through partnership with the AWRP Winter Weather and Terminal Ceiling and Visibility programs. The central domain of the study is the New York City airport region, including Long Island and neighboring portions of New Jersey. We expect first operations in December 2002 through spring 2003, and plan approximately three years' operation over the fall-winter-spring low C&V season.

With respect to the NCV development process, key goals of the field study are to

- Document and understand the structure and evolution of events that yield low visibility (especially fog) and low ceiling in the NE region;
- Gain a much improved understanding of the micro-physical structure and processes associated with fog in the NE region to improve operational forecasting;
- Support further development and field testing of the COBEL column model with respect to capability for prediction of fog, low cloud and precipitation in the NE region;
- Diagnose the forecast skill of NCV system components such as the RUC20 and Eta models; diagnose the skill of the NCV forecast system overall.

The study will utilize surface sensors and an instrumented 90 m tower at Brookhaven National Laboratory (BNL) on east-central Long Island, soundings from the NWS launch site at BNL, and additional surface and tower measurements obtained at the Rutgers University New Jersey field site. Key instrumentation to be deployed includes visibility sensors, ceilometers, an optical fog spectrometer, fast response temperature and humidity flux measurement systems, visible and IR radiometers, and a profiling microwave radiometer for temperature, humidity and liquid water observations. Further information on this emerging program is being posted on the field study web site³ on a continuing basis.

6. SUMMARY

This paper outlines the plans and first-year results of a long-term R&D program directed toward improved automated analysis and forecast tools for avoidance of in-flight C&V hazards. We principally target general aviation needs for C&V information, where improved access and utilization of briefing and in-flight guidance information can lead to a significant improvement in the safety record.

Acknowledgements

This research is in response to requirements and funding by the Federal Aviation Administration (FAA). The views expressed are those of the authors and do not necessarily represent the official policy or position of the FAA. The authors thank Martha Limber, Claudia Tebaldi, Robert Tardif and Paddy McCarthy of NCAR for their expert contributions to this work.

REFERENCES

- Benjamin, S.G., J.M. Brown, K.J. Brundage, D. Devenyi, G.A. Grell, D. Kim, T.L. Smith, T. G. Smirnova, B.E. Schwartz, S.S. Weygandt and G.S. Manikin, 2002: The 20-km Rapid Update Cycle – Overview and implications for aviation applications. Proc. 10th Conf. on Aviation, Range and Aerosp. Meteor., AMS, Boston.
- Clark, D.A., 2002: The 2001 demonstration of automated cloud forecast guidance products for San Francisco Intl. Airport. Proc. 10th Conf. on Aviation, Range and Aerosp. Meteor., AMS, Boston.
- Forsythe, J. M., T.H. Vonder Haar, and Donald L, Reinke, 2000: Cloud base height estimates from a combination of a satellite cloud classification and ceilometer-based surface reports. Proc. BACIMO 2000 Conf.
- Guedalia, D. and T. Bergot, 1994: Numerical forecasting of radiation fog. Part II: A comparison of model simulations and several observed fog events. *Mon. Wea. Rev.*, **122**, 1231-1246.
- Hilliker, J.L. and J.M. Fritsch, 1999: An observations-based statistical system for warm-season hourly probabilistic forecast of low ceiling at the San Francisco Intl. Airport. *J. Appl. Meteor.*, **38**, 1992-1705.
- Hodur, R.M., 1997: The Naval Research Laboratory's Coupled Ocean/Atmosphere Mesoscale Prediction System (COAMPS), *Mon. Wea. Rev.*, **125**, 1414-1430.
- Kulesa, G.J., D.J. Pace, W.L. Fellner, J.E. Sheets, V.S. Travers, and P.J. Kirchoffer, 2003: The FAA Aviation Weather Research Program's Contribution to Air Transportation Safety and Efficiency. Proc. 19th Conf. on Interactive Information Processing Systems for Meteorology, Oceanography and Hydrology, AMS, Boston.
- Reisner J., R.M. Rasmussen, and R. Bruintjes, 1998: Explicit forecasting of supercooled liquid water in winter storms using the MM5 model. *Quart. J. Roy. Meteorol. Soc.*, **124**, 1071-1107.
- Smith, T.L., S. Benjamin and J.M. Brown, 2002: Visibility forecasts from RUC20. Proc. 10th Conf. on Aviation, Range and Aerosp. Meteor., AMS, Boston.

³ http://www.rap.ucar.edu/~tardif/fog/field_study.htm